



P90 WIRING

Thanks for purchasing a Tonerider P90. By far the easiest way to a trouble-free installation is to carefully note down how your previous pickup was connected, and use this as a guide for correct installation on your instrument.

All Tonerider pickups have a 5-year warranty when purchased new. Please keep your receipt and see the enclosed warranty card for details.


POLARITY

All our P90 series pickups use a reverse-wound neck pickup for noise-cancelling operation. We use the following polarity and winding direction.

- Neck: South Pole Up / Counter-Clockwise Wind.
- Bridge: North Pole Up / Clockwise Wind.

THE QUICK INSTALLATION GUIDE:

- * Stick the two foam pieces on the base of the pickup, either side of the pole pieces.
- * Solder the bare wire and black wire to the back of the volume pot or any suitable ground point.
- * The white wire is the main signal wire or "hot". In most installations this is soldered to the first lug of the volume pot.
- * Pressing the strings against the high frets, set the pickup heights to 3mm from the strings (neck) and 2mm (bridge), and adjust to taste when using an amplifier at stage or studio volume for best results.

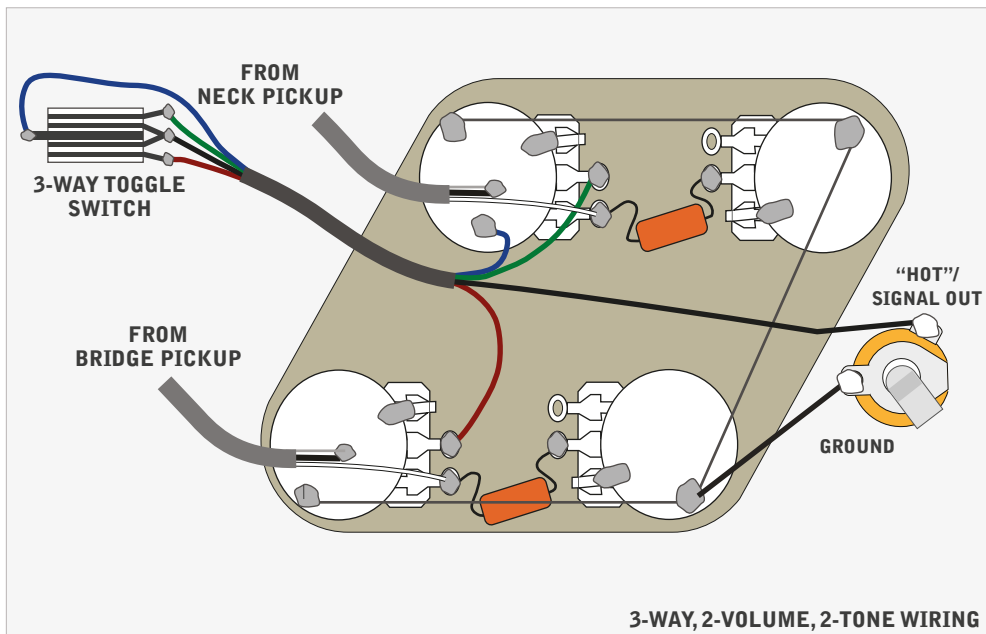

CAPACITOR & POTENTIOMETER VALUES

We design all our P90 pickups to perform with the most common industry configurations - 500k Audio Pots and 0.022uF capacitors. Many players do use 250k pots with P90s, and this in general results in a slightly darker, warmer tone. Using smaller cap values, such as 0.01uF, will make it easier to accurately control the amount of treble, but with a lower maximum setting. Larger capacitors like 0.047uF will allow far more treble to be rolled off.

FURTHER INFORMATION

If you have any questions then please Email us at service@tonerider.com or give us a call on +44 1227 469414.

More wiring guides are available for download at www.tonerider.com/wiring-diagrams